



OUTDOOR/INDOOR INFRARED

Electric & Gas Heaters

DGR Series Outdoor Infrared Propane and Natural Gas Heaters

DGR Series

Powerful, stylish heat for outdoor areas

- Infrared Heat**
High-performance ceramic burner - 31,500 BTU.
- Versatile Application**
Suitable for residential and commercial application.
- Durable**
World-class wind protection up to 9.9 mph (16 km/hr).
- Innovative Design**
Provides an easy setup with some assembly required.
- Commercial Grade**
4 tile ceramic burner.
- Ease of Use**
Electronic finger pull for easy ignition and turn-off.
- Safety**
Protective grille and reflector included.
- Automatic Shut Off**
Safety tilt switch ensures safe operation.

X-DGR32WNG

This stylish and powerful heater is perfect for permanent installations in need of added comfort.





X-DGR32WNG
31,500 BTU

25-1/2" x 16" x 11-1/2" (WxHxD)
65.0 cm x 40.6 cm x 29.2 cm

Wall-mount or ceiling-mount (optional ceiling bracket sold separately)

Space-saving and powerful

Using a plumbed natural gas line, the DGR is always ready to provide up to 31,500 BTUs of heat in commercial or residential outdoor spaces.

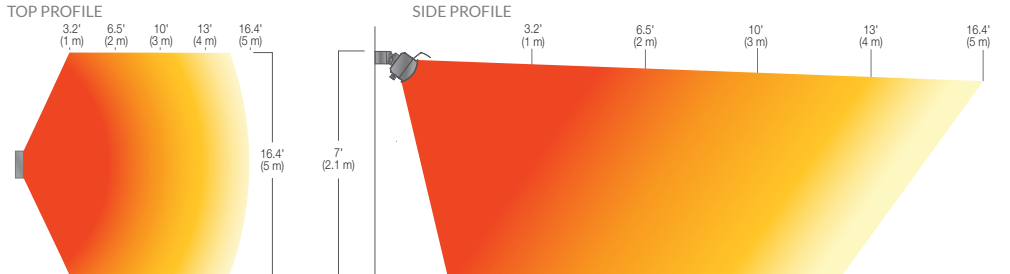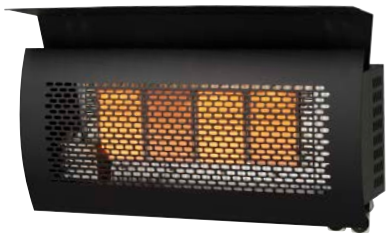

X-DGR32PLP
31,500 BTU

26-3/4" x 87-1/2" x 27" (WxHxD)
68.0 cm x 222.0 cm x 68.6 cm




Hidden built-in wheels for easy portability and storage

Enjoy portable heat where and when you need it.

X-DGR32PLP

The stylish, portable DGR model is a sophisticated upgrade to any outdoor space.

Compatible with 20 lb (9 kg) propane tank (not included)

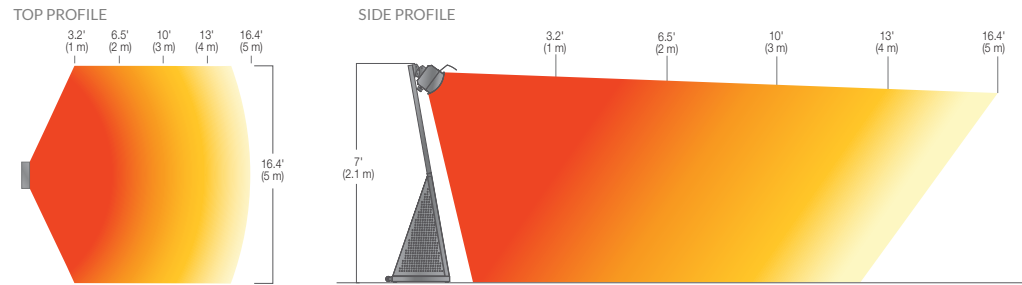

X-DGRSHIELD	Protective Heat Shield
X-DGRPOLE-WM	Ceiling-mount Bracket
X-TGHCOVER	Protective Cover



X-DGRSHIELD
Compatible with
X-DGR32WNG
and X-DGR32PLP



X-DGRPOLE-WM
Compatible with
X-DGR32WNG



X-TGHCOVER
Compatible with
X-DGR32PLP

DLW Series Outdoor / Indoor Radiant Electric Heaters

DLW Series

Stylish, slimline electric radiant heaters - perfect for protected applications.

Elegant Design

Slim profile is perfect for ceiling and wall-mount applications.

Effective Radiant Heat

Warms like the sun, heating people and objects with zero visible light or glare.

Weather-proof Construction

Safe, reliable design with an IP55 rating that provides protection against dust and water.

Ease of Installation

Fully assembled, simply mount, and hardwire using the easy to access top-mounted junction box.

Choice in Style

Offers flexibility in design with color options - choose either white or black to suit your style needs.


Hardwire Installation

Designed for permanent installations on a dedicated circuit.


Controls

Designed for hard-wired controls – switch or timer (not included).

Top-mounted Junction Box

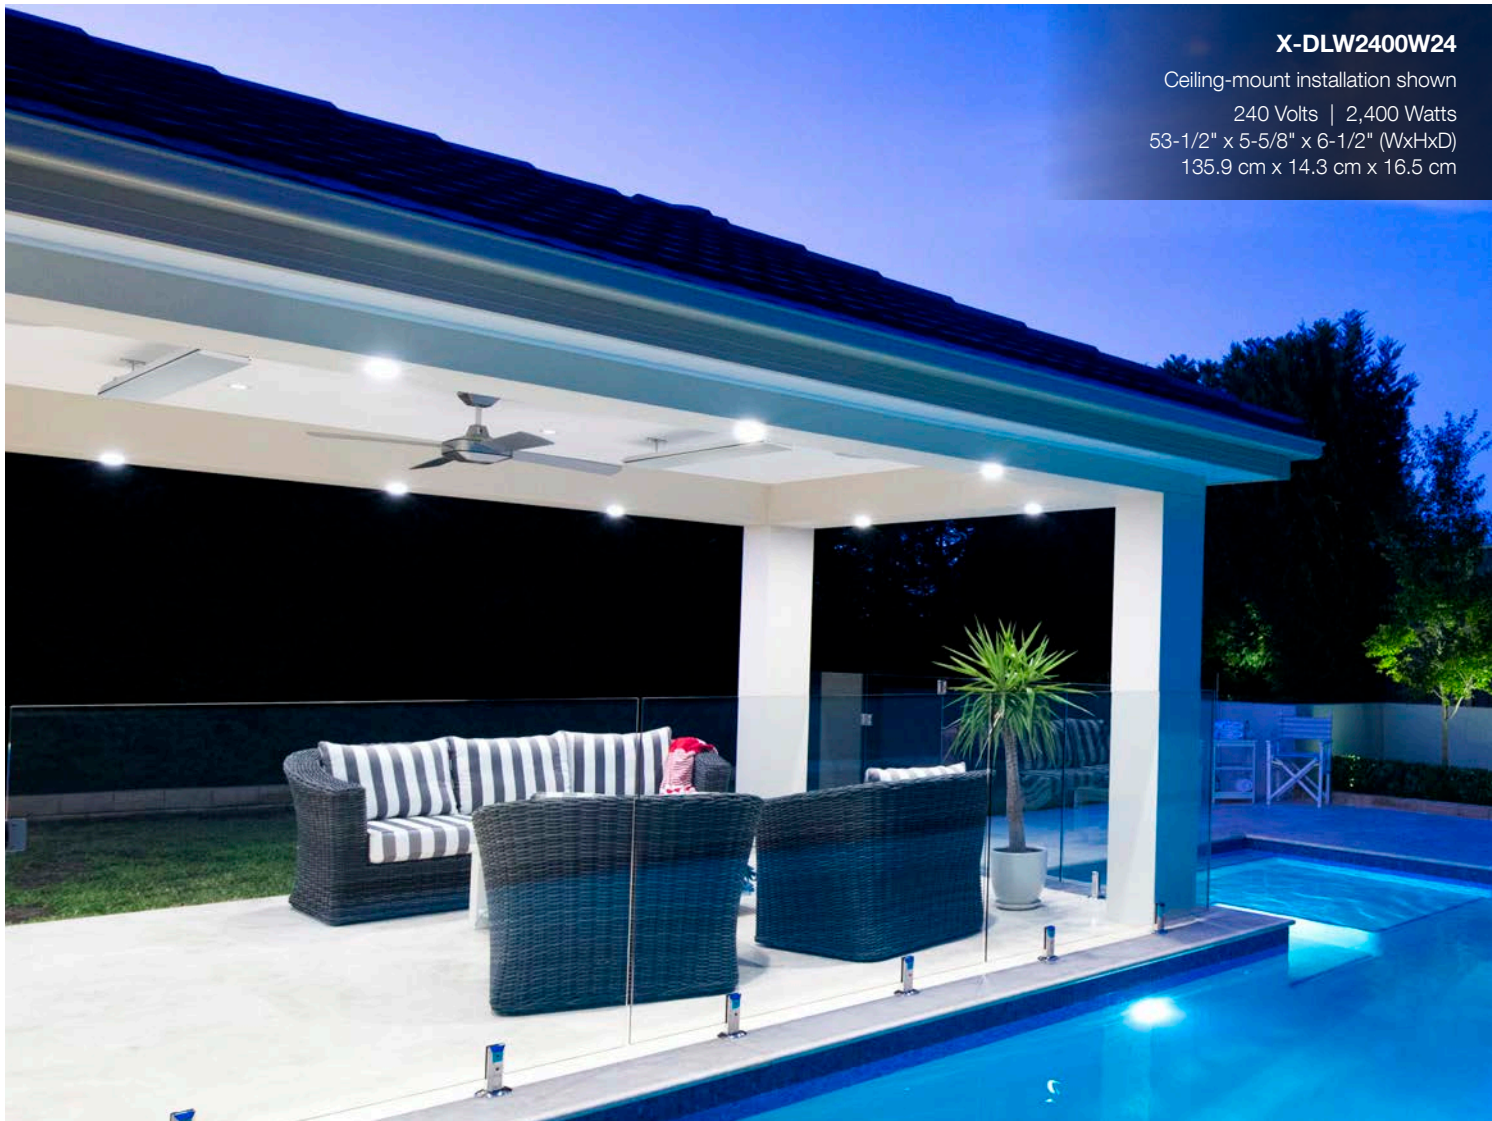

X-DLW2400W24
Ceiling-mount installation shown
240 Volts | 2,400 Watts
53-1/2" x 5-5/8" x 6-1/2" (WxHxD)
135.9 cm x 14.3 cm x 16.5 cm

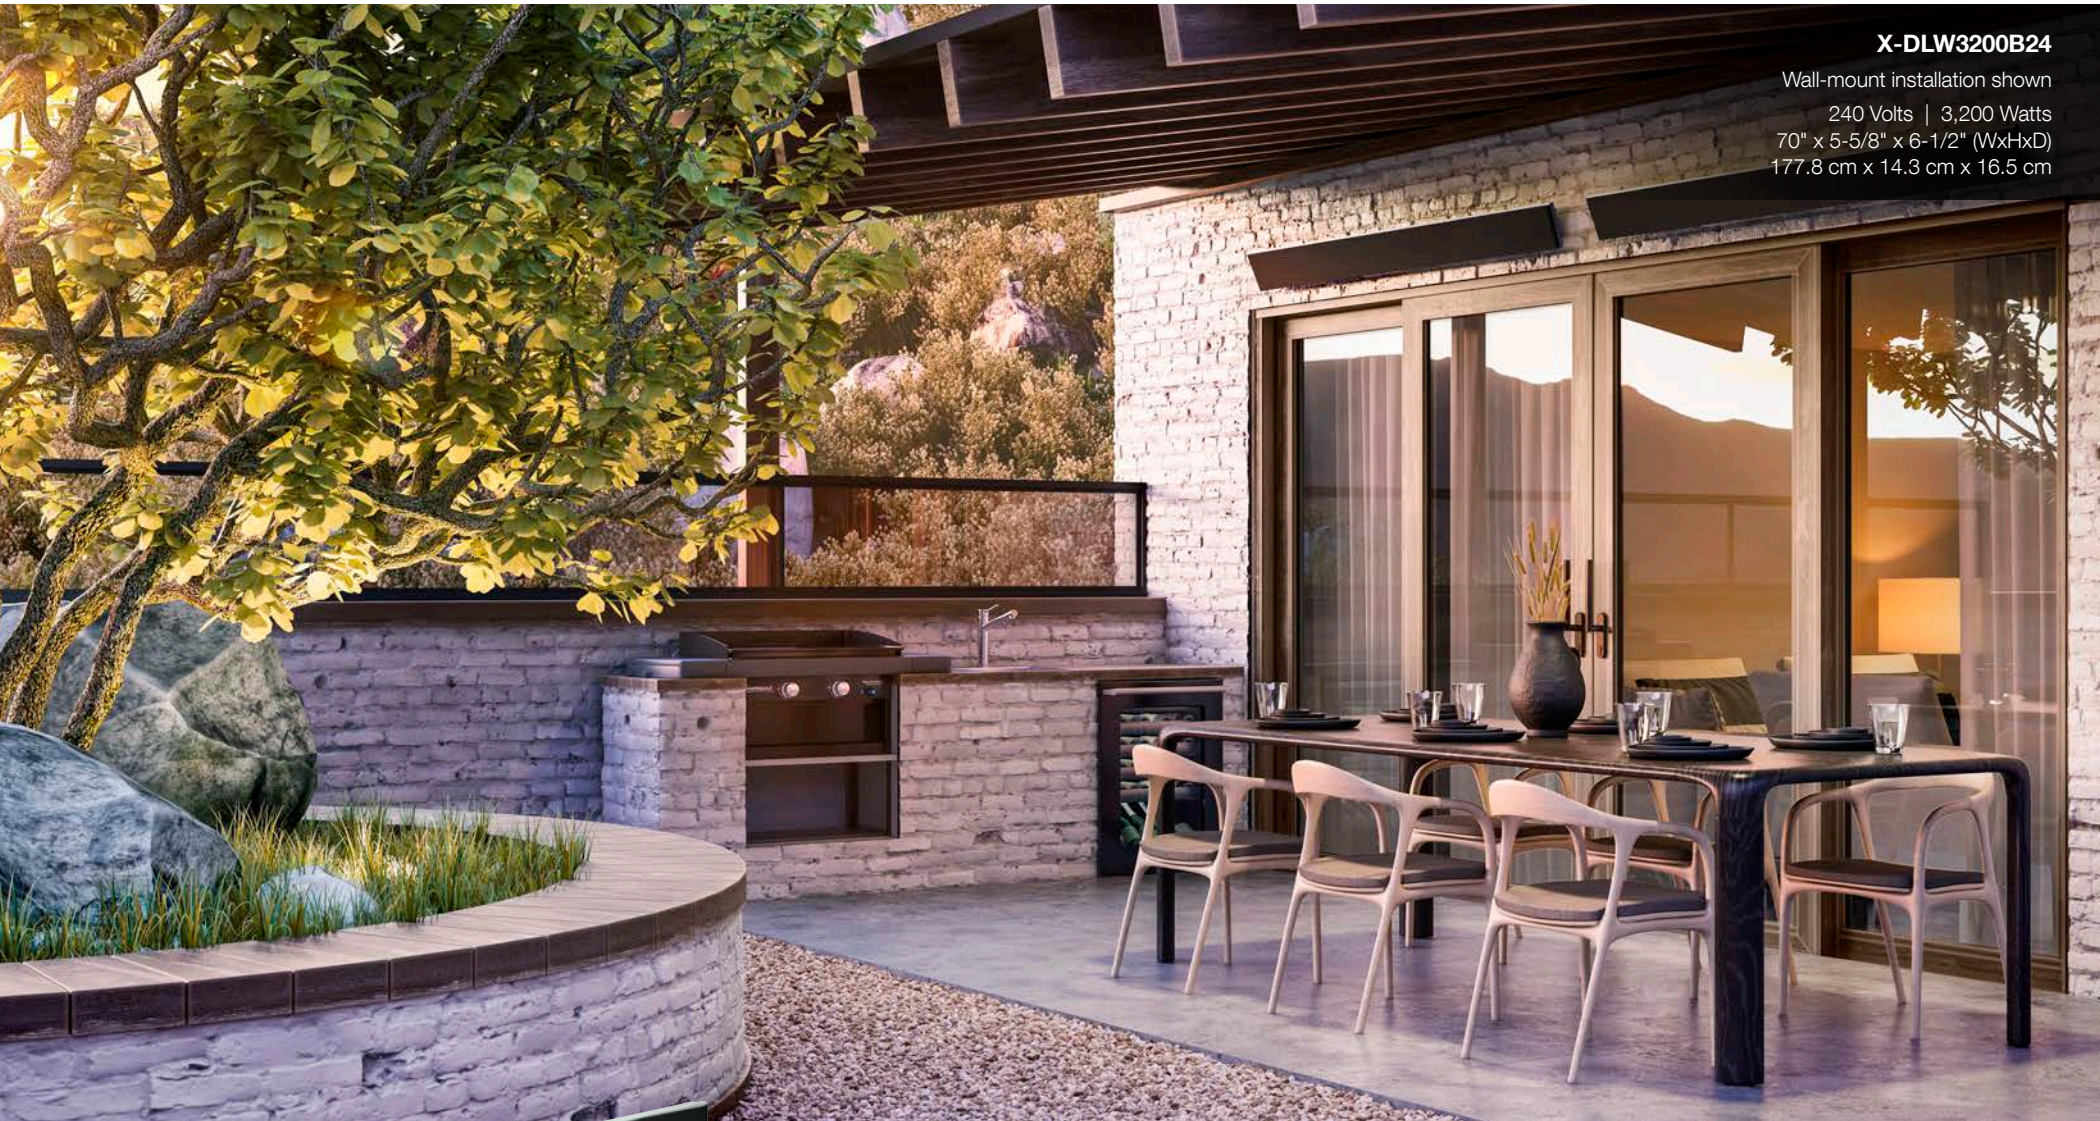


X-DLW3200B24
Wall-mount installation shown
240 Volts | 3,200 Watts
70" x 5-5/8" x 6-1/2" (WxHxD)
177.8 cm x 14.3 cm x 16.5 cm

Radiant heat with style and performance!


The DLW series features a slim profile and blends with any décor. Available in a range of sizes and wattages, this long-wave radiant electric heater emits no visible light - great for low-light environments.




Choice of color

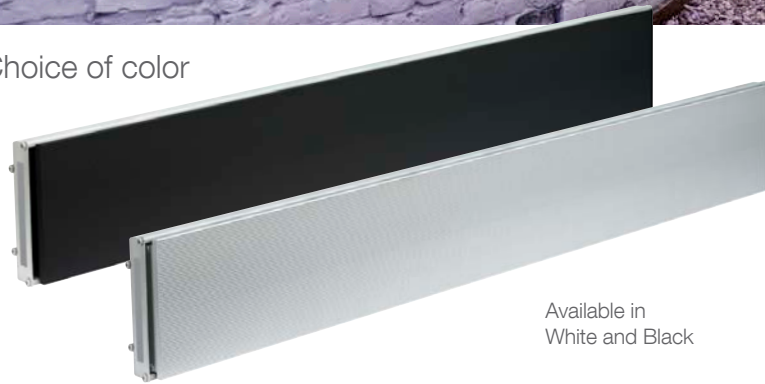


Available in
White and Black



X-DLW1500W12 (White)
X-DLW1500B12 (Black)
36" x 5-5/8" x 6-1/2" (WxHxD)
91.4 cm x 14.3 cm x 16.5 cm
120 Volts | 1,500 Watts



X-DLW2400W24 (White)
X-DLW2400B24 (Black)
53-1/2" x 5-5/8" x 6-1/2" (WxHxD)
135.9 cm x 14.3 cm x 16.5 cm
240 Volts | 2,400 Watts

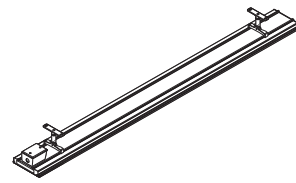


X-DLW3200W24 (White)
X-DLW3200B24 (Black)
70" x 5-5/8" x 6-1/2" (WxHxD)
177.8 cm x 14.3 cm x 16.5 cm
240 Volts | 3,200 Watts

DLW Series Outdoor / Indoor Radiant Electric Heaters



X-DLW1500W12
Ceiling-mount installation shown
120 Volts | 1,500 Watts
36" x 5-5/8" x 6-1/2" (WxHxD)
91.4 cm x 14.3 cm x 16.5 cm

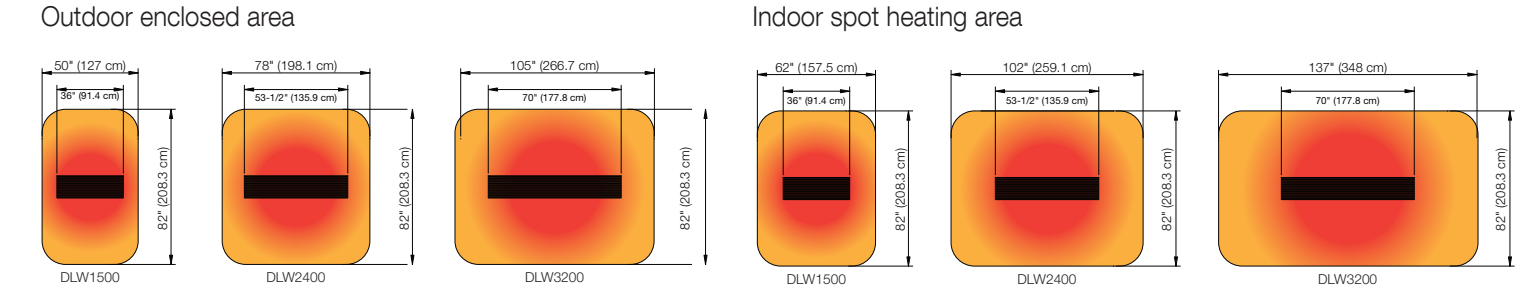

Optional Ceiling-mount Extension Poles

Use to lower the heaters to the optimal height of 8' (2.4 m) to ensure maximum comfort and performance.

Available in four different lengths:

X-DLWAC12SIL	12" Ceiling-mount Extension Pole
X-DLWAC24SIL	24" Ceiling-mount Extension Pole
X-DLWAC36SIL	36" Ceiling-mount Extension Pole
X-DLWAC48SIL	48" Ceiling-mount Extension Pole



X-DLW2400W24
Shown with 12" Ceiling-mount extension pole DLWAC24SIL



DSH Series Outdoor / Indoor Infrared Electric Heater



X-DSH20W
240 Volts | 2,000 Watts
23-1/2" x 6-1/8" x 12-7/8" (WxHxD)
59.6 cm x 15.4 cm x 32.6 cm

DSH Series
Versatile installation

The ultra-versatile DSH heater comes ready for wall-mounting, with the option to add a ceiling-mount or floor stand. For additional heat, double-up the heater in a ceiling or floor stand installation. Perfect for commercial installations.



Powerful infrared heating, when and where you need it.

DSH Series Outdoor / Indoor Infrared Electric Heater

DSH Series

Powerful infrared heating,
when and where you need it

Instant Heat
Get heat on demand with a gold-tube quartz element that provides full power in under 3 seconds.

Timer
Set timer to automatically shut off the heater after a preset time, up to 3 hrs.

Weather-proof Construction
Suitable for all climates, with an IP65 rating for outdoor or indoor use.

Corrosion Resistant
Built to last with anodized aluminum casing that provides a long life.

Durable
Meant to keep you warm for years with up to 5,000 hours of running life.

Ease of Installation
Each heater comes with the element pre-installed, which eases the installation and reduces the risk of damaged, broken or misplaced elements upon delivery.

Installation Options
Includes pivoting mounting bracket for the wall, optional ceiling mount or floor stand sold separately.

Hardwire Connection
Designed for permanent installations on a direct wired dedicated circuit.

Adjustable Angle
For optimum heat, direct the unit toward the area you want to warm up.

Remote Control (included)
Stay in control, multiple heaters can be operated with a single remote.



Automatic Standby
Unit has safety mechanism that automatically places the heater in Standby mode after 8 hours of continuous operation.



X-DSH20W
Permanent Location Floor Stand
DSHSTAND (shown with 2 heaters)



Outdoor heating area

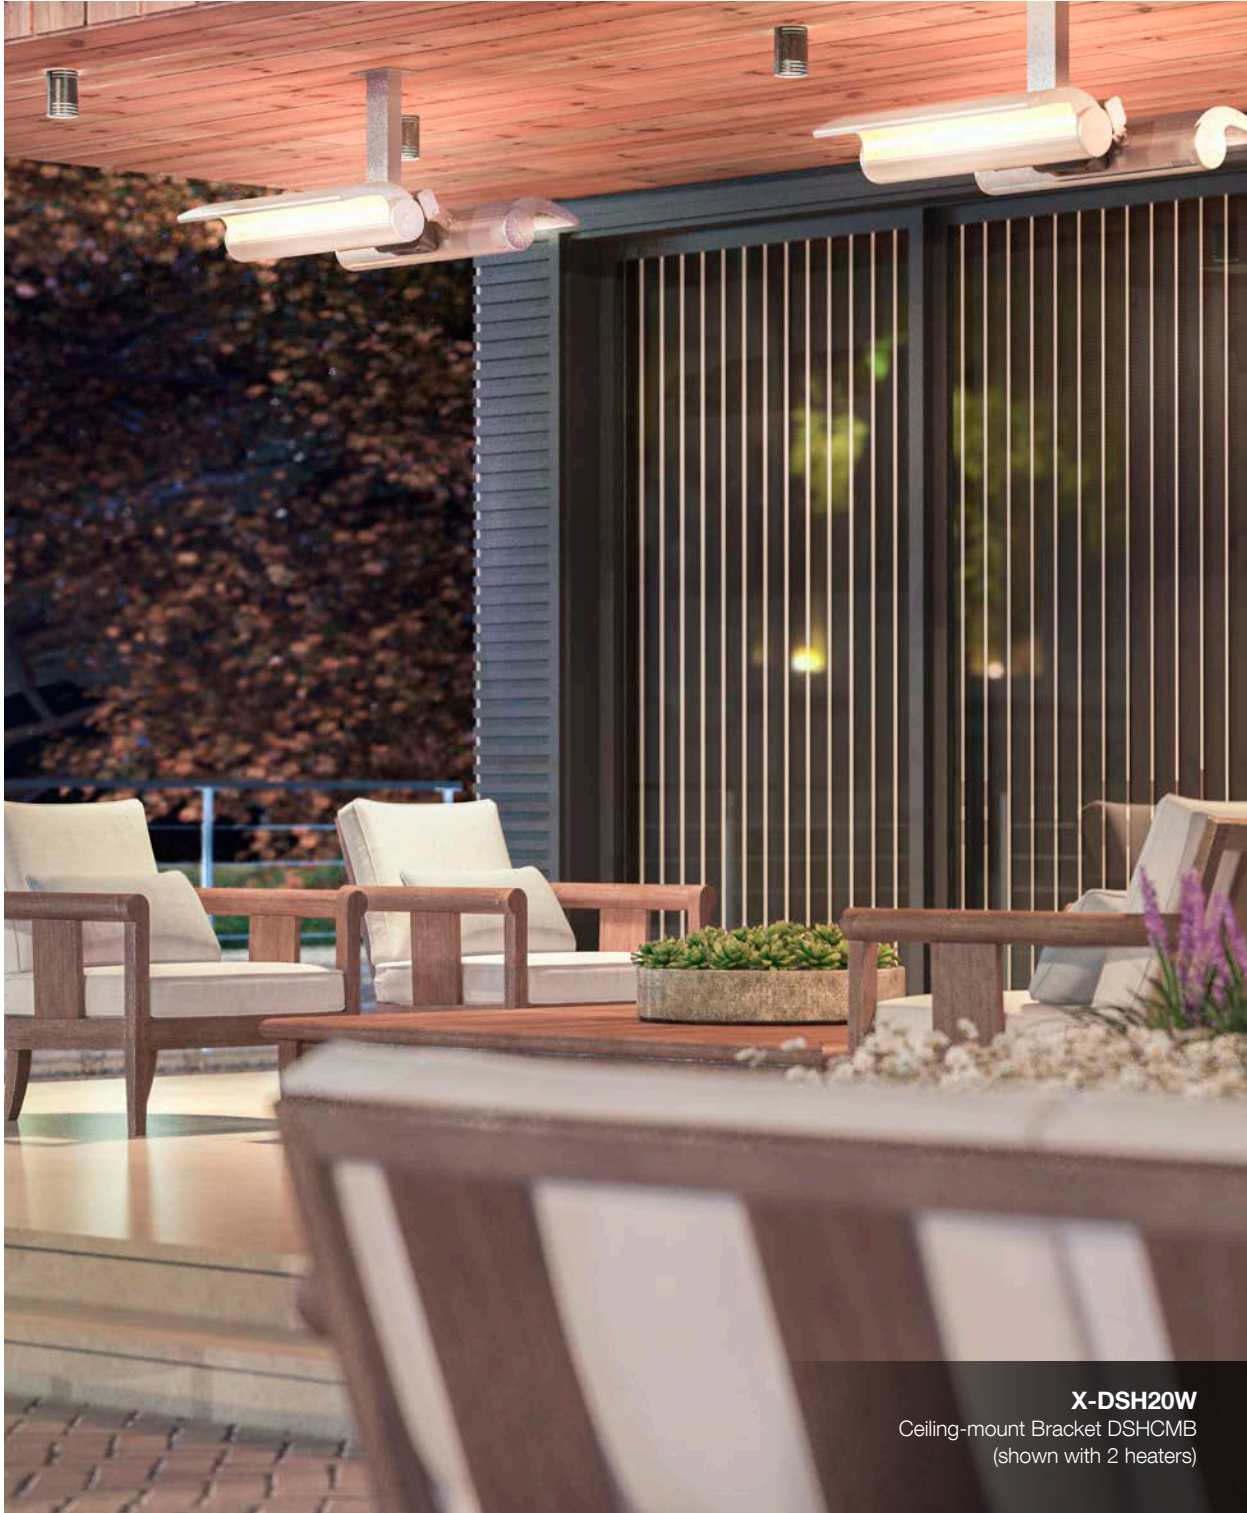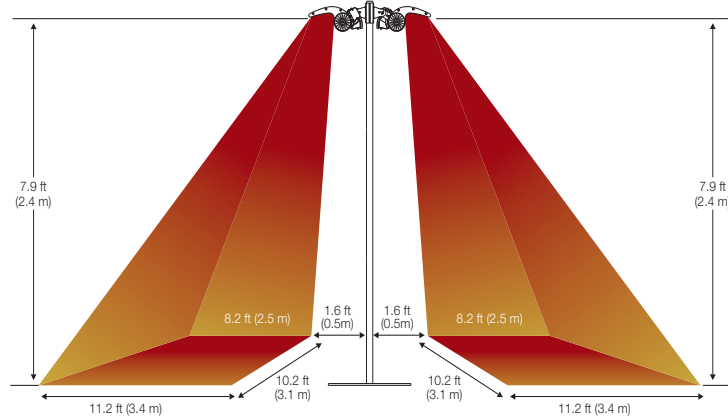

X-DSH20W
Ceiling-mount Bracket DSHCMB
(shown with 2 heaters)

DIR Series Outdoor / Indoor Infrared Heaters

DIR Series

Infrared heat with style and performance

Schott Nextrema® Glass
Schott Nextrema® glass combines high-temperature, thermal shock and chemical resistance, excellent infrared transmission, non-porous surface and attractive design.

Instant Heat
Ruby halogen bulb provides full power in under 6 seconds.

Weather-proof Construction
IP65 rated for outdoor or indoor use.


Corrosion Resistant
Anodized aluminum casing provides long life.

Durable
Up to 5,000 hours of running life.

Installation Option
Includes pivoting mounting bracket.

Hardwire Connection
Designed for permanent installations on a dedicated circuit.

Adjustable Angle

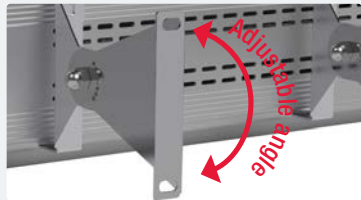

Timer
Set timer to automatically shut off the heater after a preset time.

Automatic Standby
Unit has safety mechanism that automatically places the heater in Standby mode after 8 hours of continuous operation.

Ease of Installation
Each heater comes with the element pre-installed, which eases in installation and reduces the risk of damaged, broken or misplaced elements upon delivery.

Remote control included



X-DIR15A10GR
Ceiling and wall-mount option
120 Volts | 1,500 Watts

X-DIR22A10GR
Wall-mount only
240 Volts | 2,200 Watts

35-1/2" x 6-3/4" x 5" (WxHxD)
90.2 cm x 17.0 cm x 12.8 cm

Heat in Seconds

The DIR is a sleek, safe infrared heater with extraordinary performance and available in a range of sizes and wattages. Great for commercial and residential spaces.



X-SDIR30A10GR

High-output Infrared Heater

Style and Performance

Full heating power available in under 6 seconds, you can go from cold to comfortable with a quick touch of the remote control.



Exclusive features:

More Power
Get twice the length of the original DIR15 or DIR22 models, providing twice as much infrared heat – it's like getting two units in one.




Installation Option
Includes pivoting mounting bracket and hardware for a wall-mount installation only.






X-DIR30A10GR
Wall-mount only
240 Volts | 3,000 Watts

50-5/8" x 6-3/4" x 5" (WxHxD)
128.6 cm x 17.0 cm x 12.8 cm

Indoor heating area wall-mounted

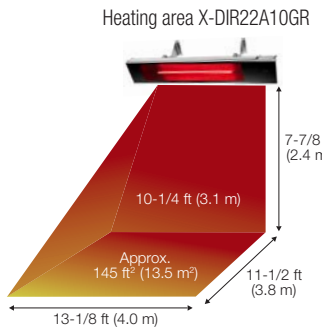

Outdoor heating area wall-mounted

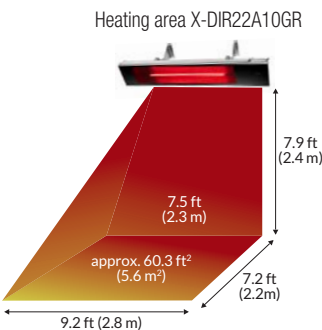

DIR Series Outdoor / Indoor Infrared Heaters

DIR Plug-in Series

Outdoor/Indoor Wall-mount Infrared Heater.

Schott Nextrema® Glass

Schott Nextrema® glass combines high-temperature, thermal shock and chemical resistance, excellent infrared transmission, non-porous surface and attractive design.

Instant Heat

Ruby halogen bulb provides full power in under 6 seconds.

Innovative Design

Ensures a safe, easy and space-saving installation. Includes pivoting mounting bracket.

Maximum Comfort

3 power settings: low (600W), medium (1050W), high (1500W).

Timer


Set timer to automatically shut off the heater after a preset time, up to 13 hrs.

On-screen Display

Shows power setting and timer function at a glance.

Just Plug It In

7.7 ft. (2.3 m) cord with grounded plug, standard 120V outlet.

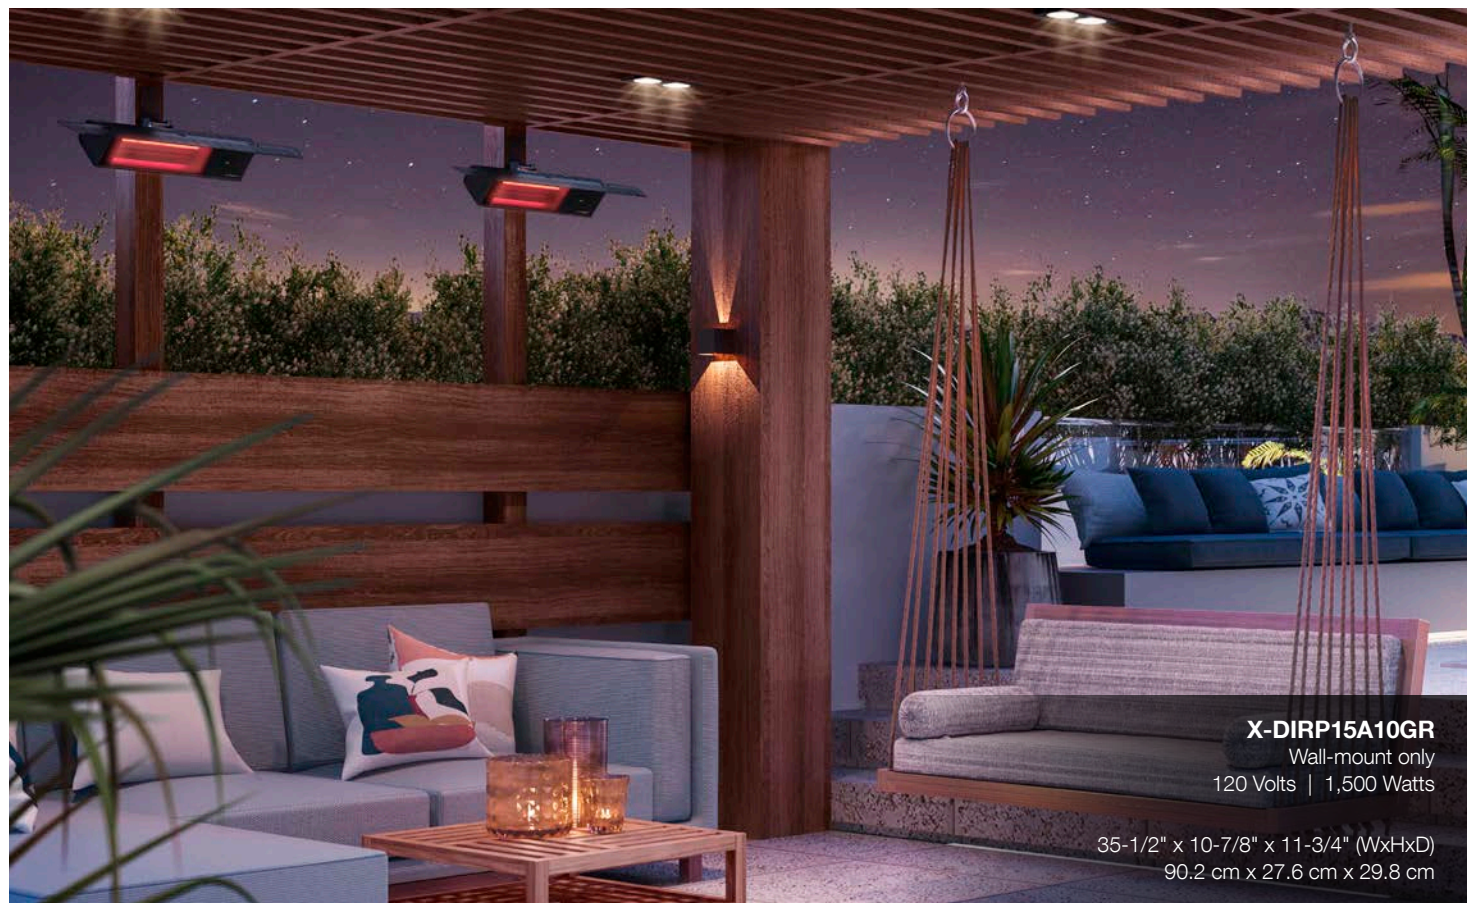


X-DIRP15A10GR


Wall-mount only
120 Volts | 1,500 Watts

35-1/2" x 10-7/8" x 11-3/4" (WxHxD)
90.2 cm x 27.6 cm x 29.8 cm

Outdoor heating area: wall-mounted
Heating area X-DIRP15A10GR



Indoor heating area: wall-mounted
Heating area X-DIRP15A10GR



Powerful heat combined with convenience

Infrared heat at its finest; keep family, friends, guests, or patrons comfortable with sun-like warmth in a matter of seconds. Mount, plug-in, and heat – installation made easy.



For more information and product specifications, please contact **AMD Direct**.

Specifications, finishes and dimensions are subject to change and should be taken as a guide only. This product may be covered by one or more U.S. patents or pending patent applications. Visit amddirect.com for details or call 800-966-8126 for customer service.

